


## DIAGRAM MCL 2P, type 1741, 1742, 1743, 1745

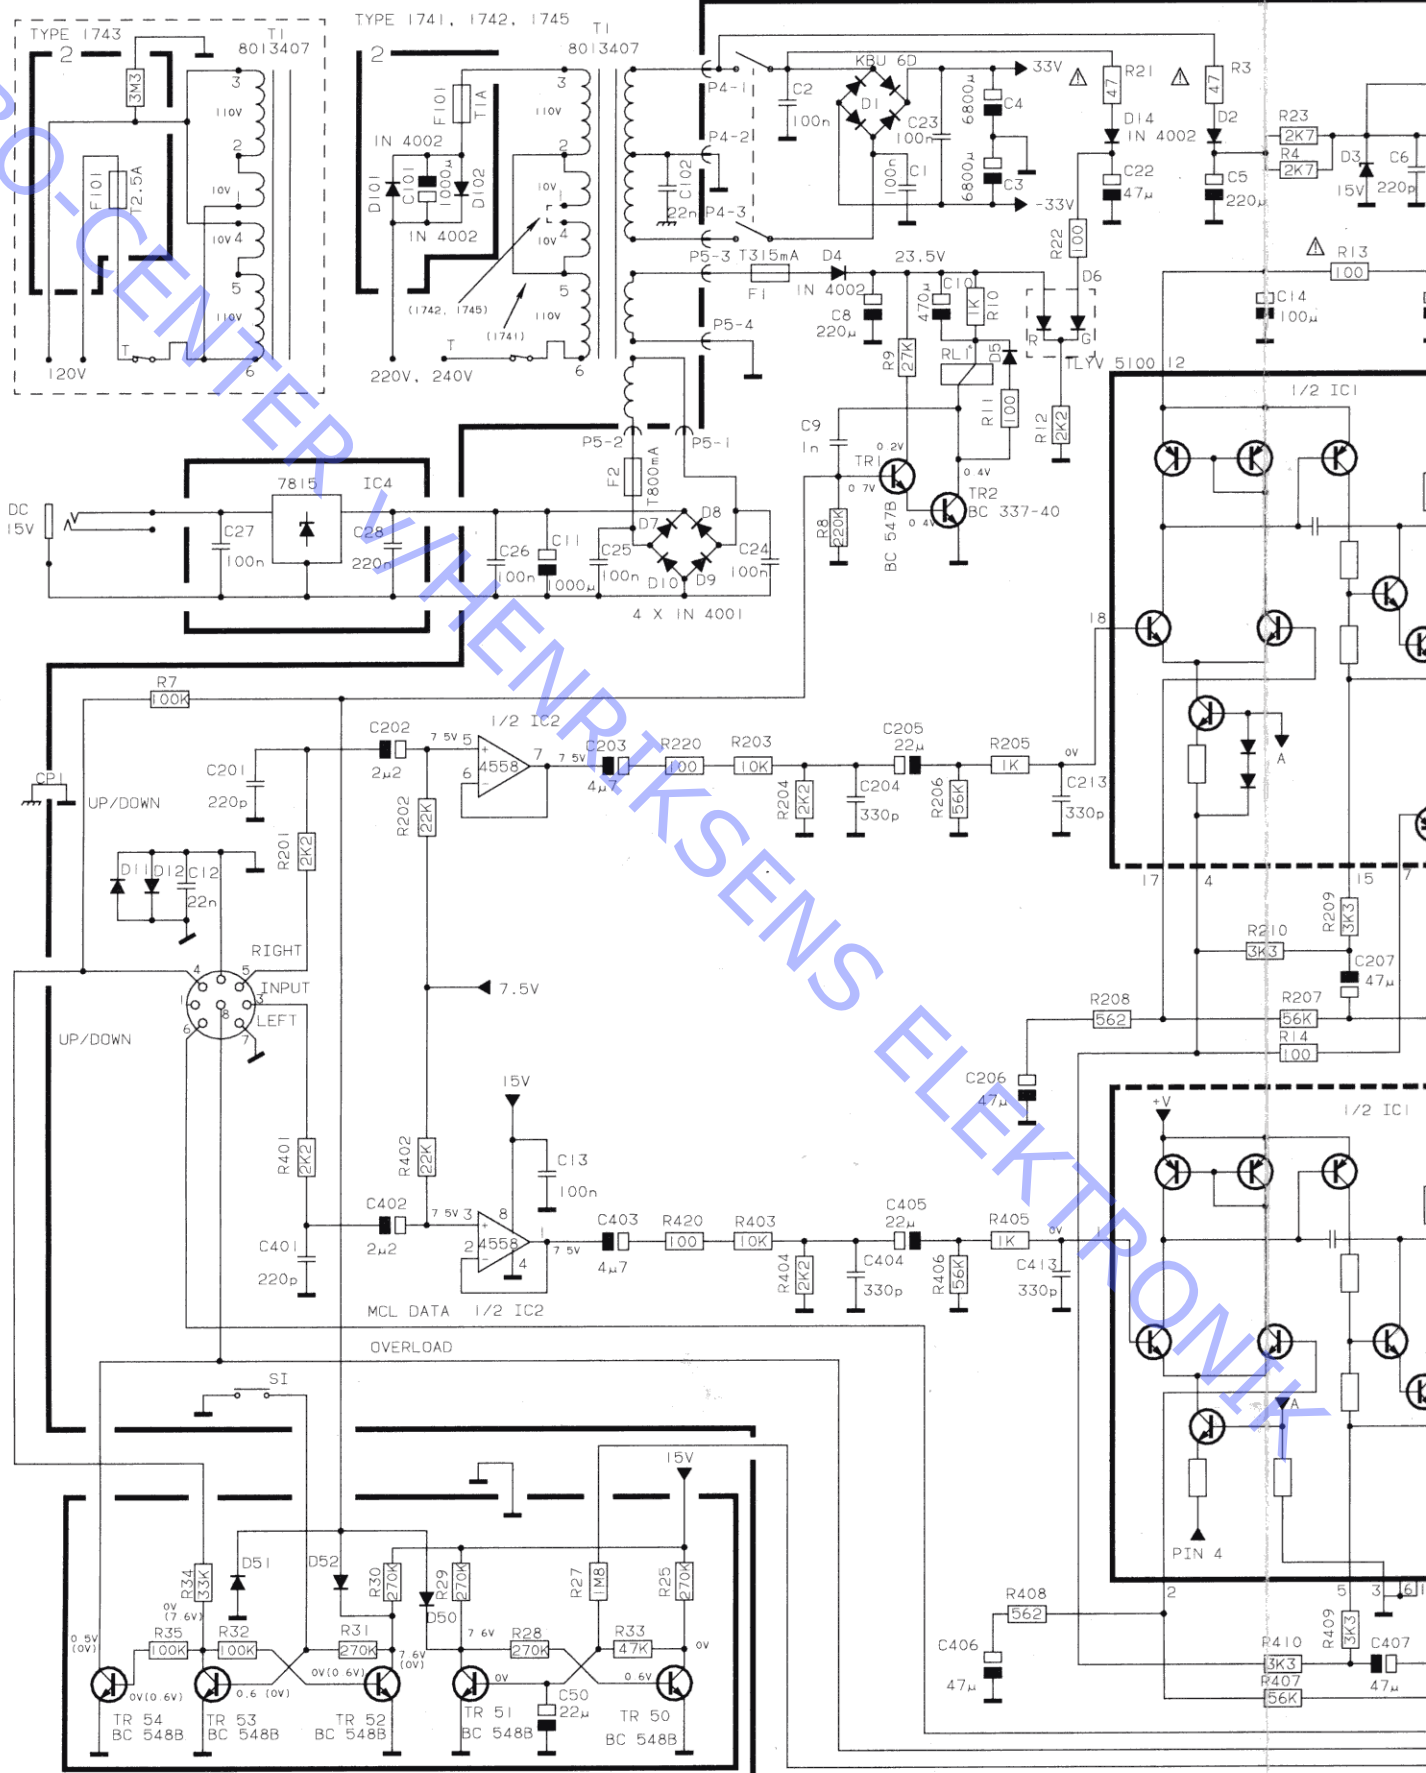


Erstatter side 2-27 og 2-28 i SERVICEANVISNING - MASTER CONTROL LINK™™ (3538711)  
Replaces pages 2-27 and 2-28 in SERVICE MANUAL - MASTER CONTROL LINK™™ (3538711)

3538783

3-91


8002764  
AMPLIFIER

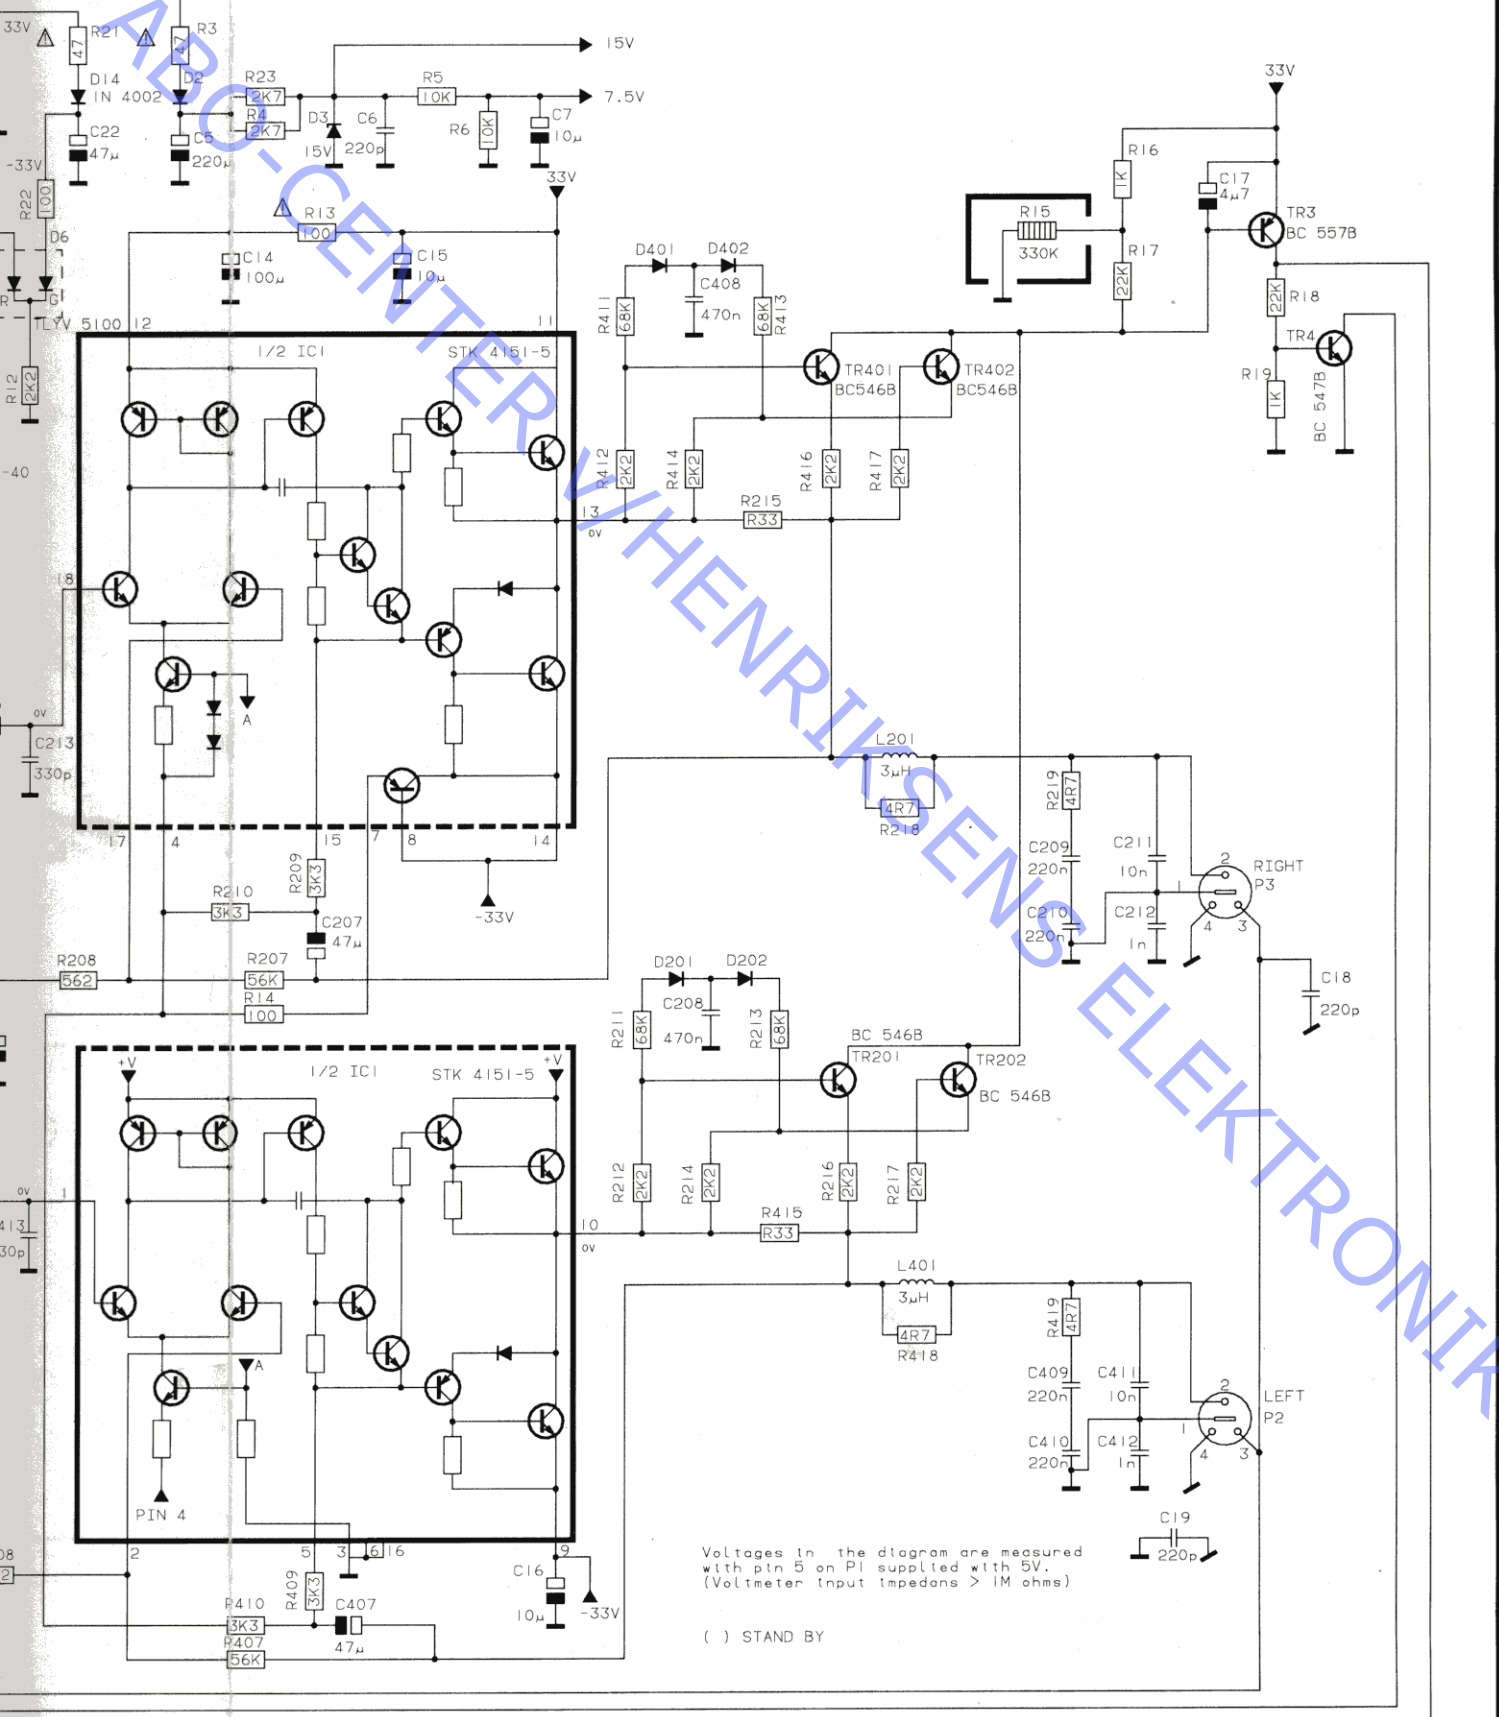


Voltages in the diagram are measured with pin 5 on PI supplied with 5V. (Voltmeter input impedans > 1M ohms)

( ) STAND BY

DIAGRAM MCL 2P, type 1741, 1742, 1743, 1745 from ser. no. 08588230

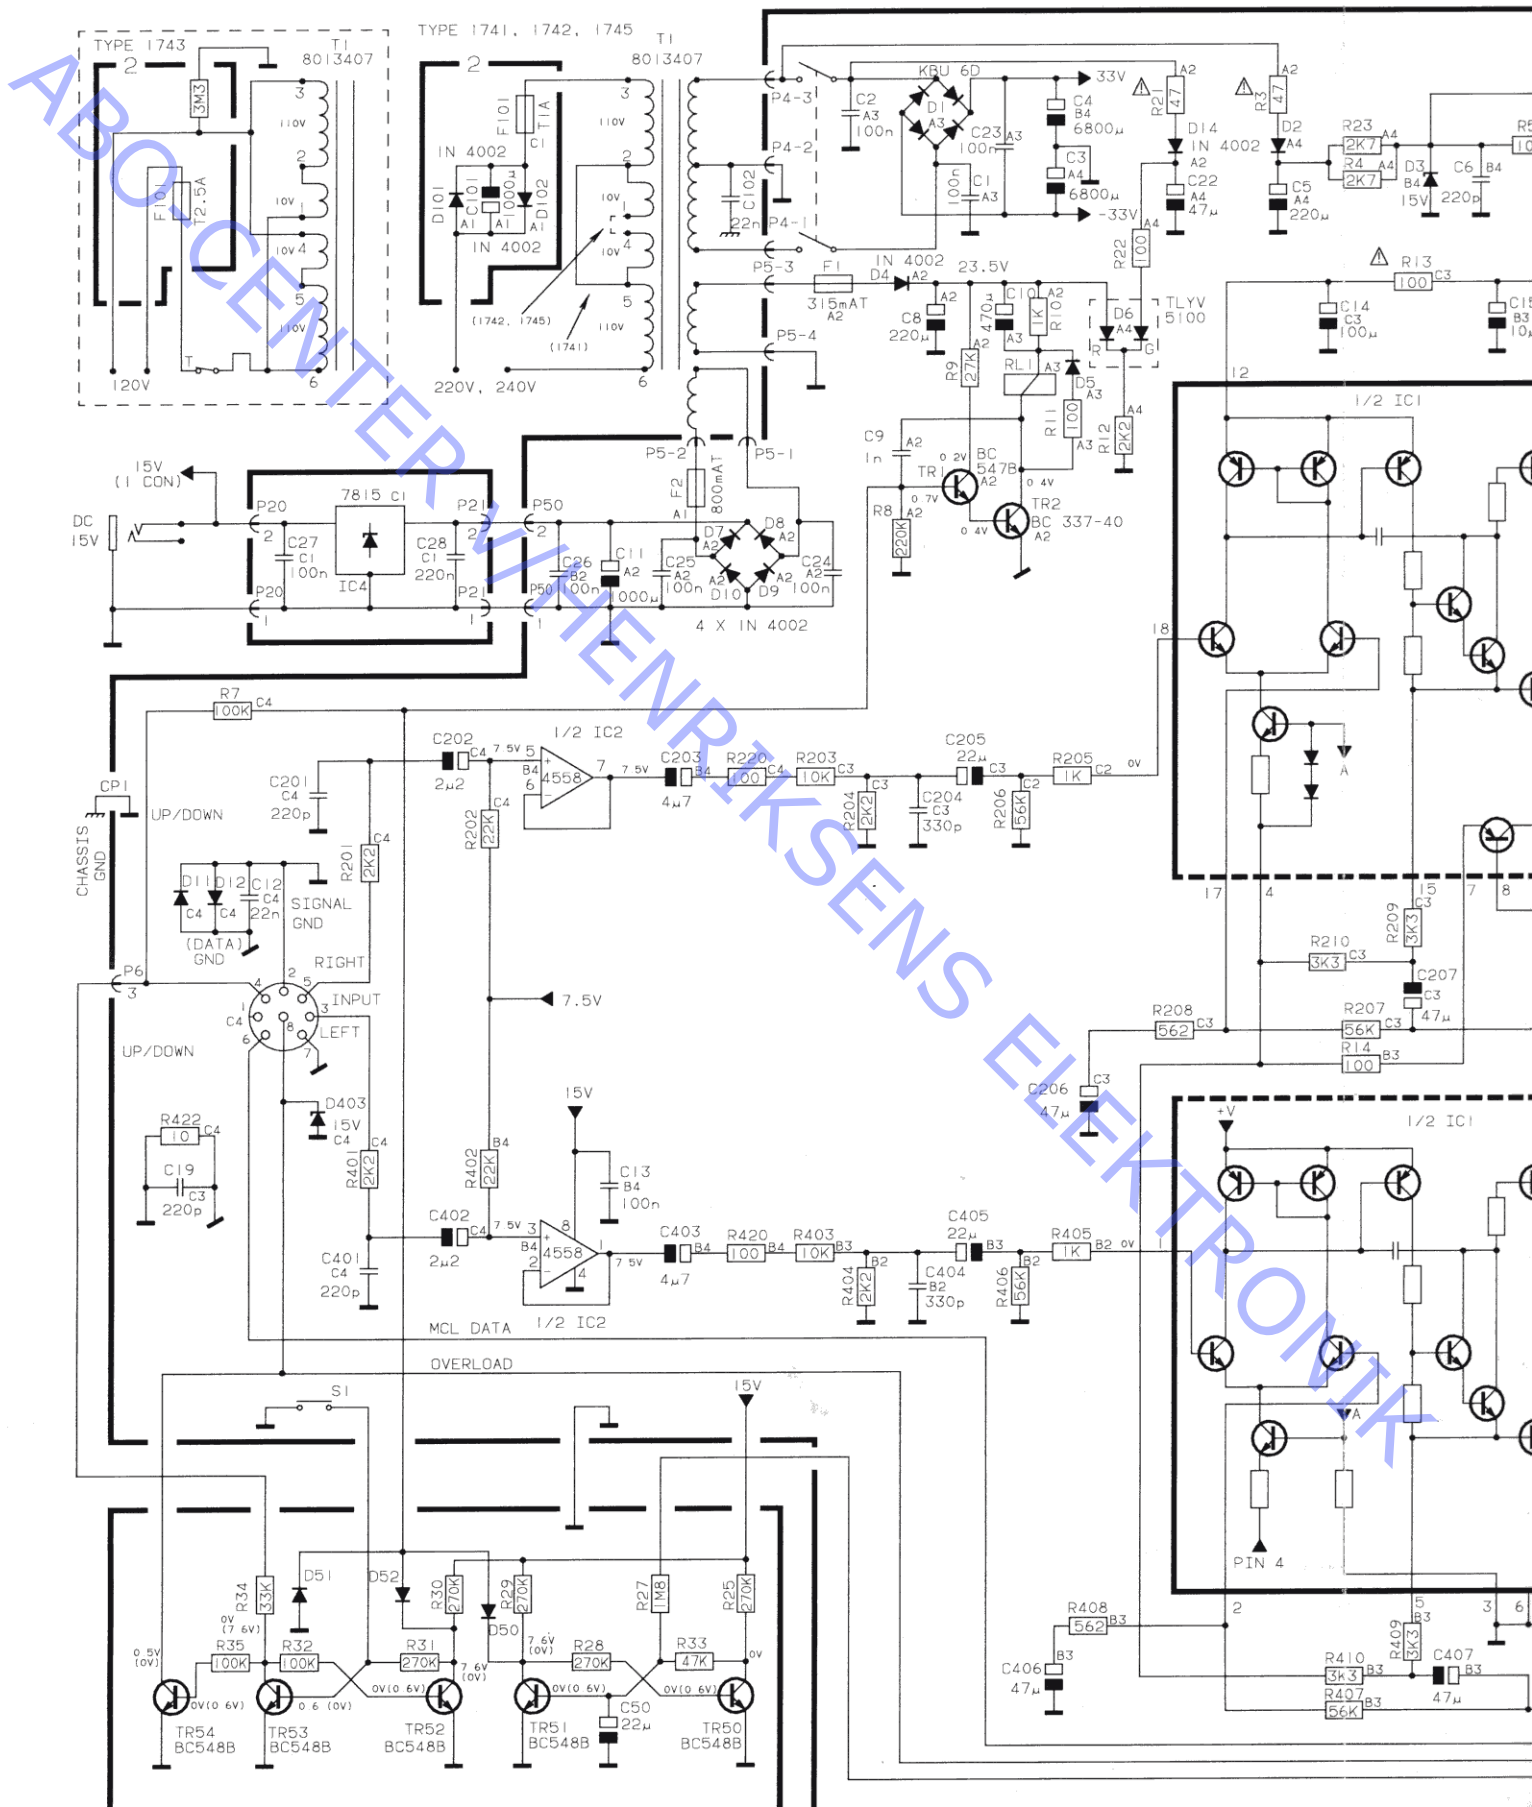

8002764  
AMPLIFIER

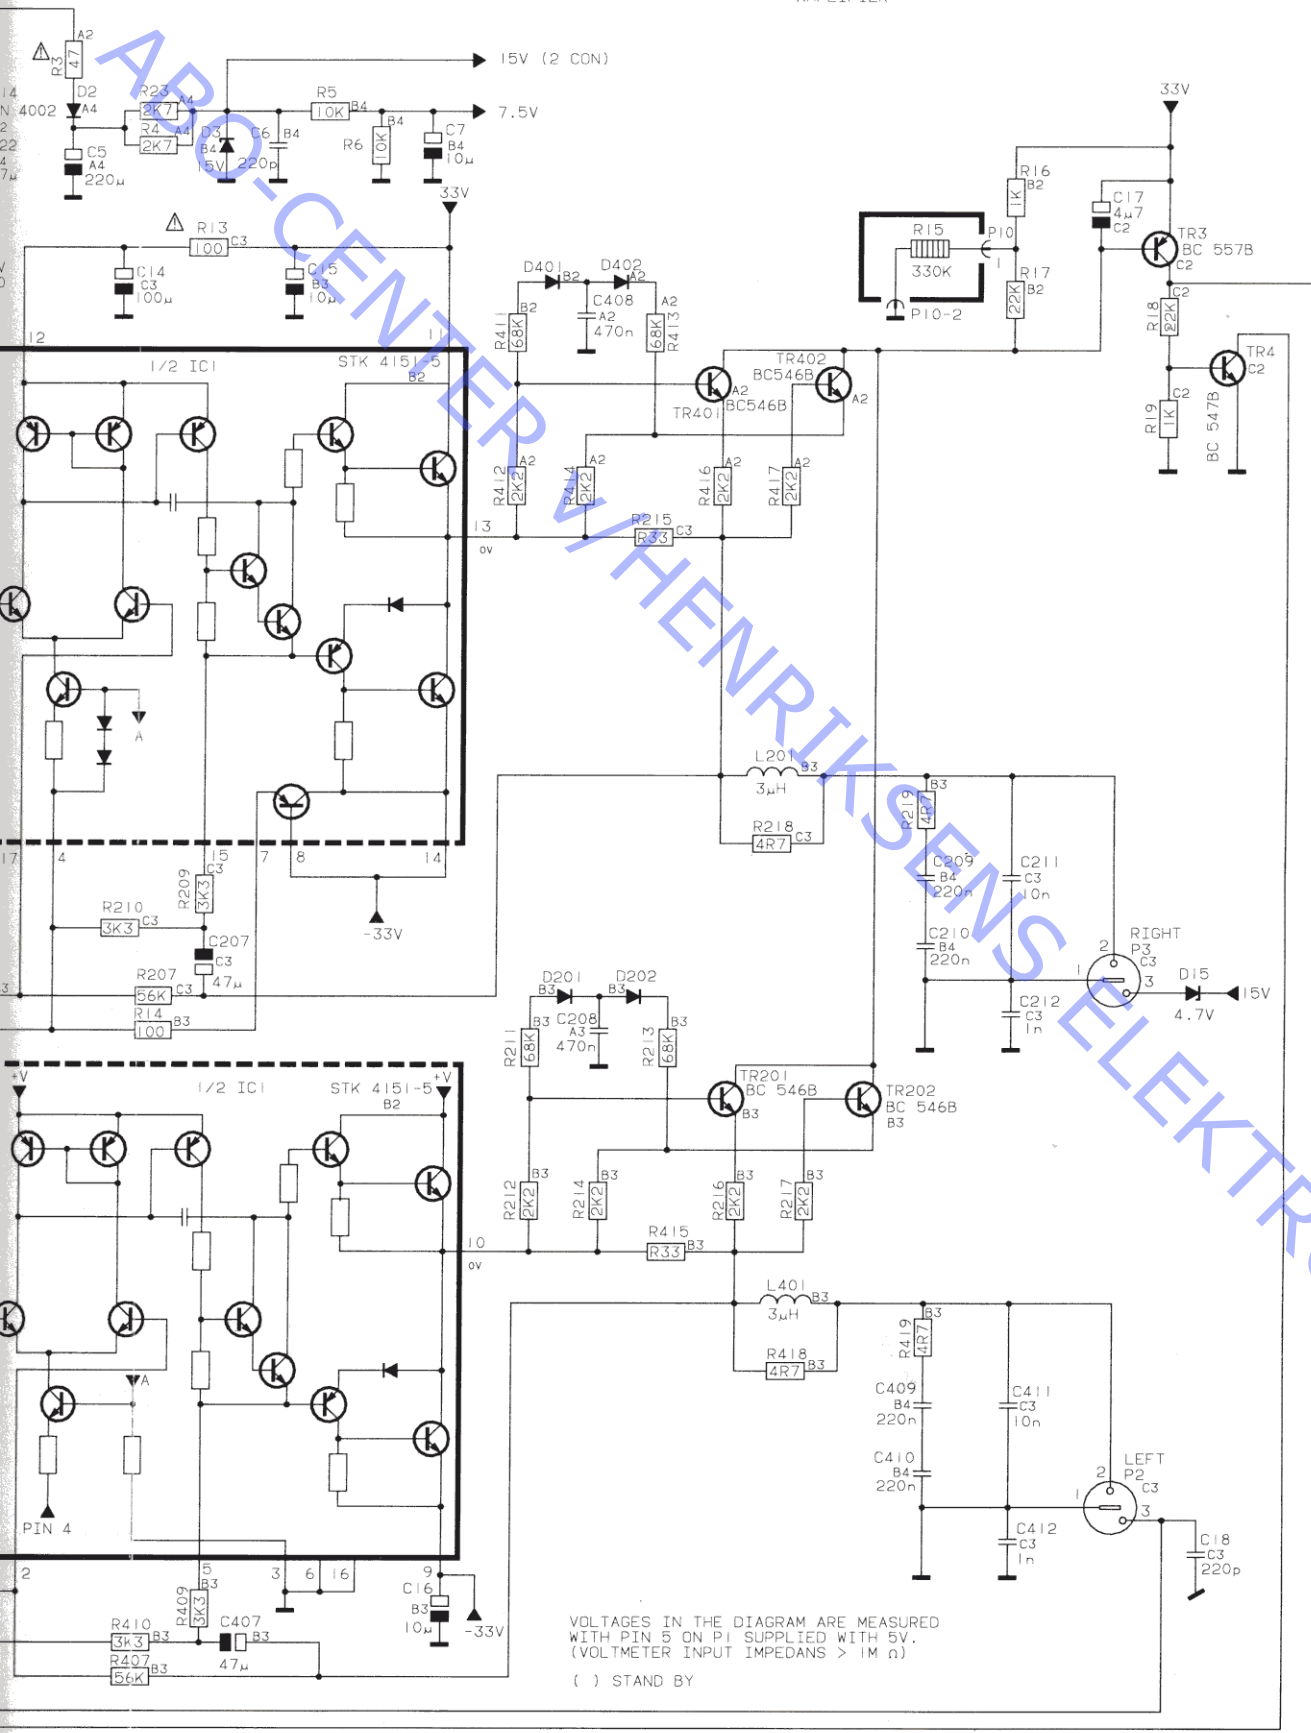

VOLTAGES IN THE DIAGRAM ARE MEASURED WITH PIN 5 ON P1 SUPPLIED WITH 5V. (VOLTMETER INPUT IMPEDANS > 1M Ω)

( ) STAND BY